

## Features and Benefits

- Pre-aligned, pre-calibrated detector & spectrograph**  
 Motorized, individually factory-calibrated systems – out-of-the-box operation and seamless integration to experimental set-ups
- USB 2.0 interface**  
 Plug and play connectivity, ideal for laptop operation alongside Andor USB cameras
- Motorized, indexed triple grating turret**  
 Easily upgradable in-the-field
- Dual detector outputs**  
 For extended wavelength coverage when combining Andor UV-Visible CCD and InGaAs cameras  
 Compatible with Andor's range of CCD, ICCD & EMCCD cameras
- Multi-track enhanced option**  
 Optimizes system performance for low cross-talk, high density multi-leg fibre signal acquisition
- Wide range of accessories available**  
 The ultimate in modular set-up and in-field upgradability, including:
  - Motorized slits & filter wheel
  - Microscope interfaces
  - Shutters
  - Fibre-optic & lens couplers
  - Multi-way fibre-optic bundles
  - Light sources and optics
- Monochromator capabilities**  
 Extract best optical resolution while allowing use of single point detectors with sensitivity up to 12  $\mu\text{m}$
- Silver-protected coated optics options**  
 Most efficient for Near-Infrared detection when used in conjunction with Andor InGaAs cameras and single point detectors InGaAs, PbS, InSb & MCT

## High resolution performance spectrograph


The Shamrock 750 offers the highest resolution of the Shamrock family, but is also well suited for application requiring multi-track capabilities. This rugged platform features a comprehensive range of light coupling accessories and gratings, and combines ideally with Andor's market leading CCD, Electron Multiplying CCDs, InGaAs and Intensified CCDs. Andor's latest addition of single point detectors for scanning monochromator applications up to the LWIR (12  $\mu\text{m}$ ) enhances even further the capabilities of this system. State-of-the-art Solis Spectroscopy and Solis Scanning software offer a dedicated and intuitive interfaces for spectrograph, detectors and motorized accessory control as well as easy detection parameter set-up.

## Specifications Summary

<b>Resolution with Newton DU940 CCD</b>	
1200 l/mm @ 500 nm	0.04 nm
2400 l/mm @ 300 nm	0.02 nm
<b>Aperture</b>	F/9.7
<b>Focal Length</b>	750 mm
<b>Magnification (Vertical @ centre of CCD)</b>	1
<b>Gratings</b>	Interchangeable indexed triple turret
<b>Slit width range (input/output)</b>	Manual or Motorized 10 $\mu\text{m}$ to 2.5 mm
<b>Communication</b>	USB 2.0
<b>Wavelength Accuracy</b>	0.03 nm
<b>Wavelength Repeatability</b>	10 $\mu\text{m}$

## Step-by-Step System Configuration

How to customize the Shamrock 750 :

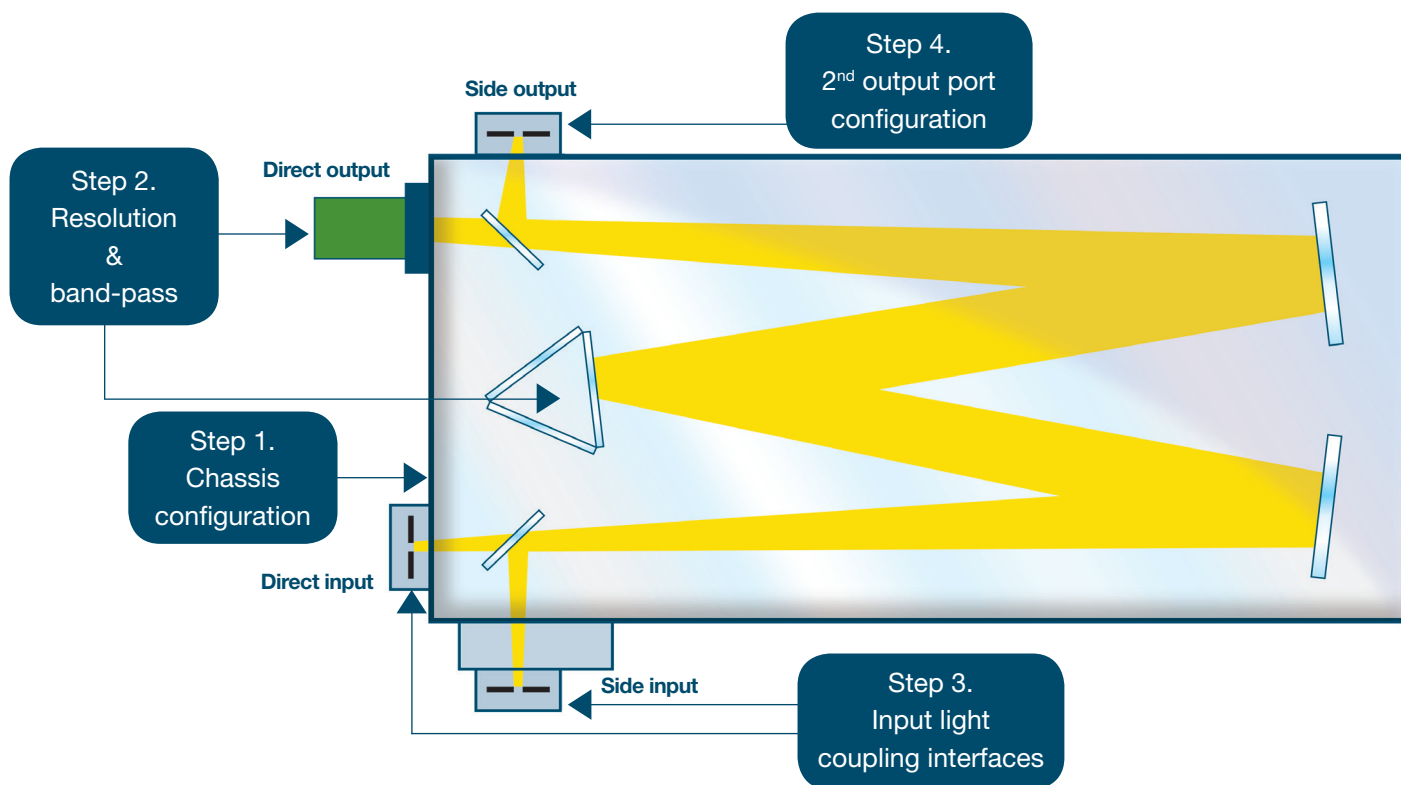

### Step 1. - Chassis configuration

- Select combination of input and output ports (see page 3 for available options).
- Select type of optics coating required (aluminium +  $\text{MgF}_2$  is standard, protected silver coated optics available on request for NIR detection).
- Select purge port option (for extended detection below 180 nm), and shutter for background acquisition and detectors protection.

### Step 2. - Resolution & band-pass

- Select the appropriate Shamrock spectrograph platform, giving due consideration to bandpass and spectral range requirement.
- Select gratings and detector to fulfil resolution requirements.
- Select gratings for suitable wavelength coverage.

### Step 3. - Input light coupling interface

Refer to accessory tree for available configurations (direct coupling, fibre coupling or 3<sup>rd</sup> party hardware connectivity).

### Step 4. - 2<sup>nd</sup> exit port configuration

Refer to accessory tree for available configurations, including camera flanges.

### Step 5. - Software interface


Select either state-of-the-art Solis software or Software Development Kit (SDK) option – please refer to appropriate section for further information.

## Step 1 - Chassis Configuration

### Ordering Information

Model	Side input port	Direct input port	Direct output port	Side output port	Motorized flipper mirror
SR-750-A	Manual slit	-	Camera	-	-
SR-750-B1	Manual slit	-	Camera	Manual slit	✓
SR-750-B2	Manual slit	-	Camera	Camera	✓
SR-750-C	Manual slit	Manual slit	Camera	-	✓
SR-750-D1	Manual slit	Manual slit	Camera	Manual slit	✓
SR-750-D2	Manual slit	Manual slit	Camera	Camera	✓
SR-750-X-SIL	Protected silver coated optics options for models shown above (replace X with relevant model number)				

## Optics Coatings Reflectivity Graph

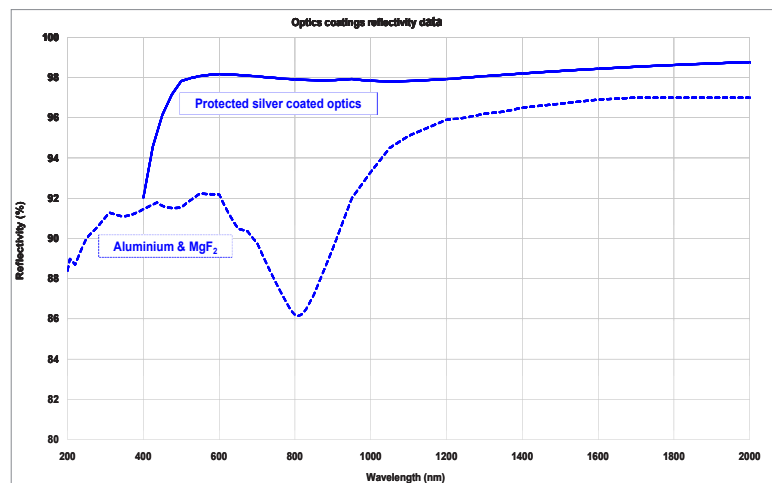


The graph shows the standard Al + MgF<sub>2</sub> optics coatings reflection efficiency versus wavelengths.

Protected silver coated optics option is also available on request for maximum efficiency in the NIR region and is recommended for working with Andor iDus InGaAs detectors or IR single-point detectors, such as MCT, PbS and InSb.

When choosing protected silver coatings, it is strongly recommended to also order **protected silver coated gratings** for maximum efficiency throughout the system.

## Chassis Accessories

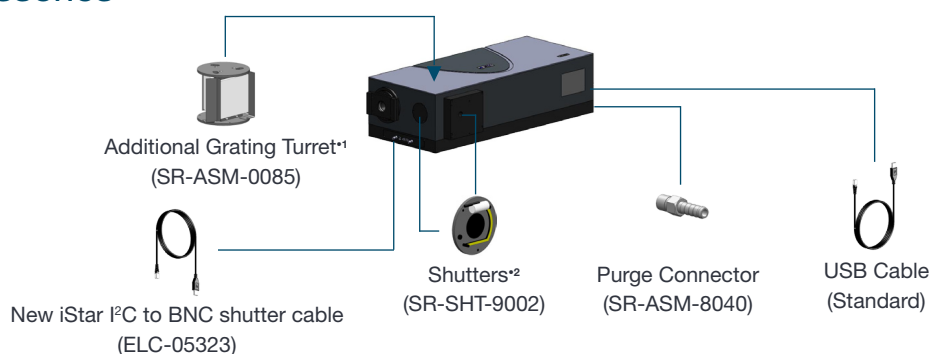

## Step 2a - Choosing The Right Platform vs Dispersion Requirements



Resolution calculator

[andor.com/calculators](https://andor.com/calculators)

**Green**

Aberration-free region

**Orange**

Possible impact on  
system resolution

**Red**

Likely impact on system  
resolution

Czerny-Turner spectrographs are designed to provide the best optical performance for a range of grating angles as reflected on the green parts of the graph above. Outside this range, the spectral lines may exhibit a degree of optical aberration (such as coma), which will become more prominent at the steeper angles. These configurations are reflected by the orange to red scales on the graph. In these regions, consideration should be given to higher spectrograph focal length models with lower groove density gratings to achieve the desired resolution.

	Grating (l/mm)					
	150	300	600	1200	1800 (Holo)	2400 (Holo)
<b>Shamrock 163</b>						
Bandpass (nm) <sup>*3,*5</sup>	1072	529	256	117	68	56 <sup>*6</sup>
Resolution (nm) <sup>*4,*5</sup>	1.57	0.77	0.37	0.17	0.10	0.08 <sup>*6</sup>
<b>Shamrock 303i</b>						
Bandpass (nm) <sup>*3,*5</sup>	600	297	144	67	39	32 <sup>*6</sup>
Resolution (nm) <sup>*4,*5</sup>	0.88	0.43	0.21	0.10	0.06	0.05 <sup>*6</sup>
<b>Shamrock 500i</b>						
Bandpass (nm) <sup>*3,*5</sup>	357	177	86	40	26	19 <sup>*6</sup>
Resolution (nm) <sup>*4,*5</sup>	0.52	0.26	0.13	0.06	0.04	0.03 <sup>*6</sup>
<b>Shamrock 750</b>						
Bandpass (nm) <sup>*3,*5</sup>	242	120	59	28	18	14 <sup>*6</sup>
Resolution (nm) <sup>*4,*5</sup>	0.35	0.18	0.09	0.04	0.03	0.02 <sup>*6</sup>

Where aberration is a concern for a particular experimental set-up, the table above shows resolution and band-pass performance for a variety of alternative configurations. This should be used in conjunction with the graph above to assist in selecting the most appropriate Shamrock spectrograph platform to meet resolution and band-pass needs, whilst minimising the risk of potential aberration.

## Step 2b - Choosing The Right Grating vs Resolution & Band-pass

The Shamrock 750 features an innovative triple grating turret, designed to offer flexibility and control over your choice and interchange of gratings. The triple grating turret can be easily and speedily removed, and replaced by an alternative turret with new gratings. The intelligent design of the 750 means that only a simple offset adjustment is required once the new turret and gratings are added. The 750 is shipped with the grating turret already in place, ensuring your system is ready for use straight out of the box. Additional grating turrets are available with up to three pre-installed gratings (see below for details). If the grating you require is not on the list, please contact Andor for further details. Additional grating turrets (part number SR-ASM-0085) can also be supplied on request.









Lines/mm	Blaze (nm)	Nominal dispersion (nm/mm) <sup>*7</sup>	Bandpass (nm) <sup>*3,*7</sup>	Resolution (nm) <sup>*4,*7,*10</sup>	Peak efficiency (%)	Andor part number	Maximum recommended wavelength (nm)	Maximum attainable wavelength (nm)
150	300	8.78	243	0.36	72	SR5-GRT-0150-0300	6995	11440
150	500	8.76	242	0.35	73	SR5-GRT-0150-0500		
150	800	8.72	241	0.35	80	SR5-GRT-0150-0800		
150	1250	8.66	240	0.35	84	SR5-GRT-0150-1250		
150	2000	8.53	236	0.35	88	SR5-GRT-0150-2000		
300	300	4.38	121	0.18	88	SR5-GRT-0300-0300	3500	5720
300	500	4.35	120	0.18	81	SR5-GRT-0300-0500		
300	1000	4.27	118	0.17	72	SR5-GRT-0300-1000		
300	1200	4.23	117	0.17	92	SR5-GRT-0300-1200		
300	1700	4.11	114	0.17	89	SR5-GRT-0300-1700		
600	300	2.17	60	0.09	84	SR5-GRT-0600-0300	1750	2860
600	500	2.13	59	0.09	72	SR5-GRT-0600-0500		
600	1000	2.01	56	0.08	72	SR5-GRT-0600-1000		
600	1200	1.95	54	0.08	88	SR5-GRT-0600-1200		
600	1900 (@1600) <sup>*8</sup>	1.64 1.79	45 49	0.07 <sup>*9</sup> 0.07	88	SR5-GRT-0600-1900		
1200	300	1.06	29	0.04	72	SR5-GRT-1200-0300	875	1430
1200	500	1.01	28	0.04	81	SR5-GRT-1200-0500		
1200	1000 (@ 800) <sup>*8</sup>	0.79 0.89	22 25	0.03 <sup>*9</sup> 0.04	69 69	SR5-GRT-1200-1000		
1200	Holographic (500 nm peak)	1.00	28	0.04 <sup>*9</sup>	81	SR5-GRT-1200-EH*		
1800	Holographic (250 nm peak)	0.69	19	0.03	62	SR5-GRT-1800-DH	585	955
1800	Holographic (380 nm peak)	0.66	18	0.03	70	SR5-GRT-1800-FH		
2400	300	0.49	13	0.02	68	SR5-GRT-2400-0300	435	715
2400	Holographic (220 nm peak)	0.51	14	0.02	68	SR5-GRT-2400-BH		
2400	Holographic (400 nm peak)	0.45	12	0.02	73	SR5-GRT-2400-GH		
Mirror	UV-VIS	-		-	-	SR5-GRT-MR-AL-	-	-
Mirror	VIS-NIR	-		-	-	SR5-GRT-MR-SILVER		

\*Option for minimized scattered light.

**Need to have maximum collection efficiency in the NIR/SWIR?** All gratings are also available with protected silver coating. Please contact your local representative for further information.

## Step 2c - Selecting The Correct Grating Efficiency Option

All graphs shown below represent efficiency for 45° polarisation

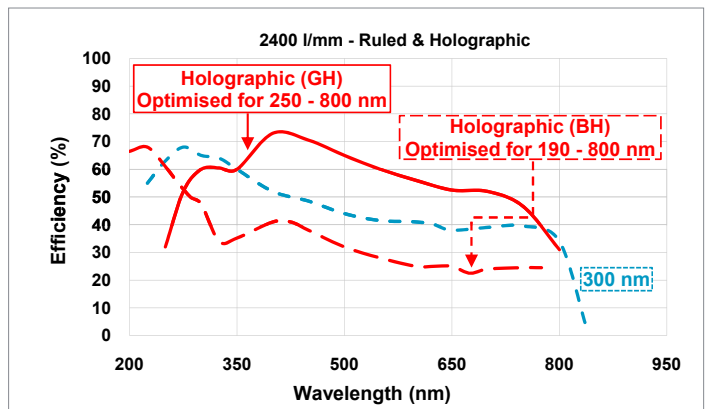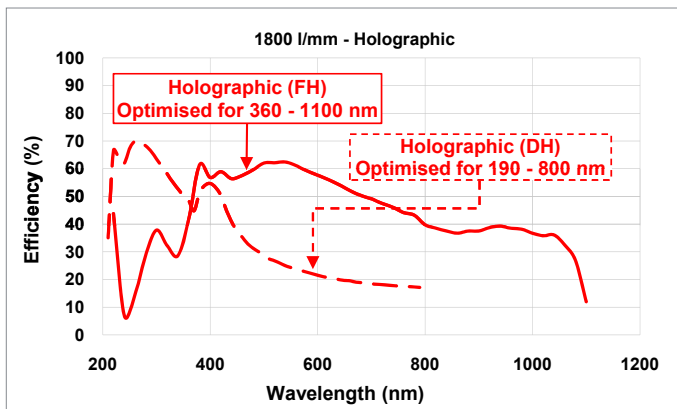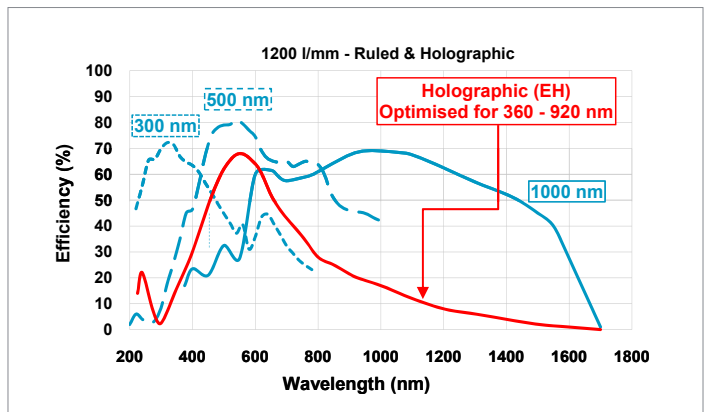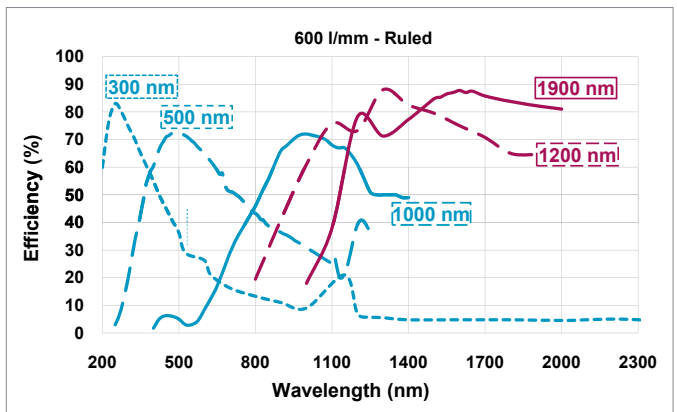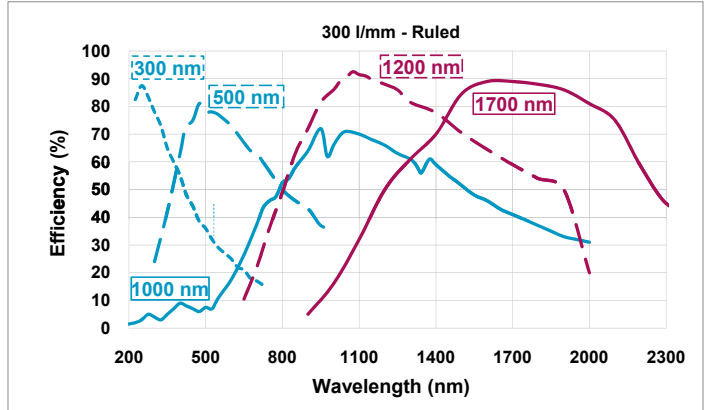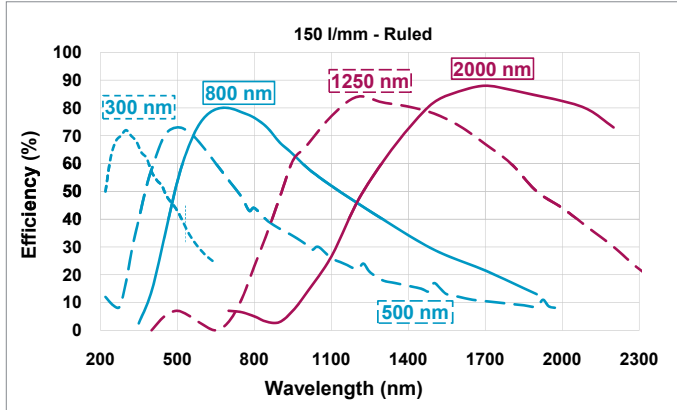


## Important Consideration

System throughput is dependent on the grating's angle of operation and may decrease with higher grating operating angles.




## Step 3 - Selecting The Correct Light Coupling Interfaces

How to customize the Shamrock 750 (Side Entrance Port) :

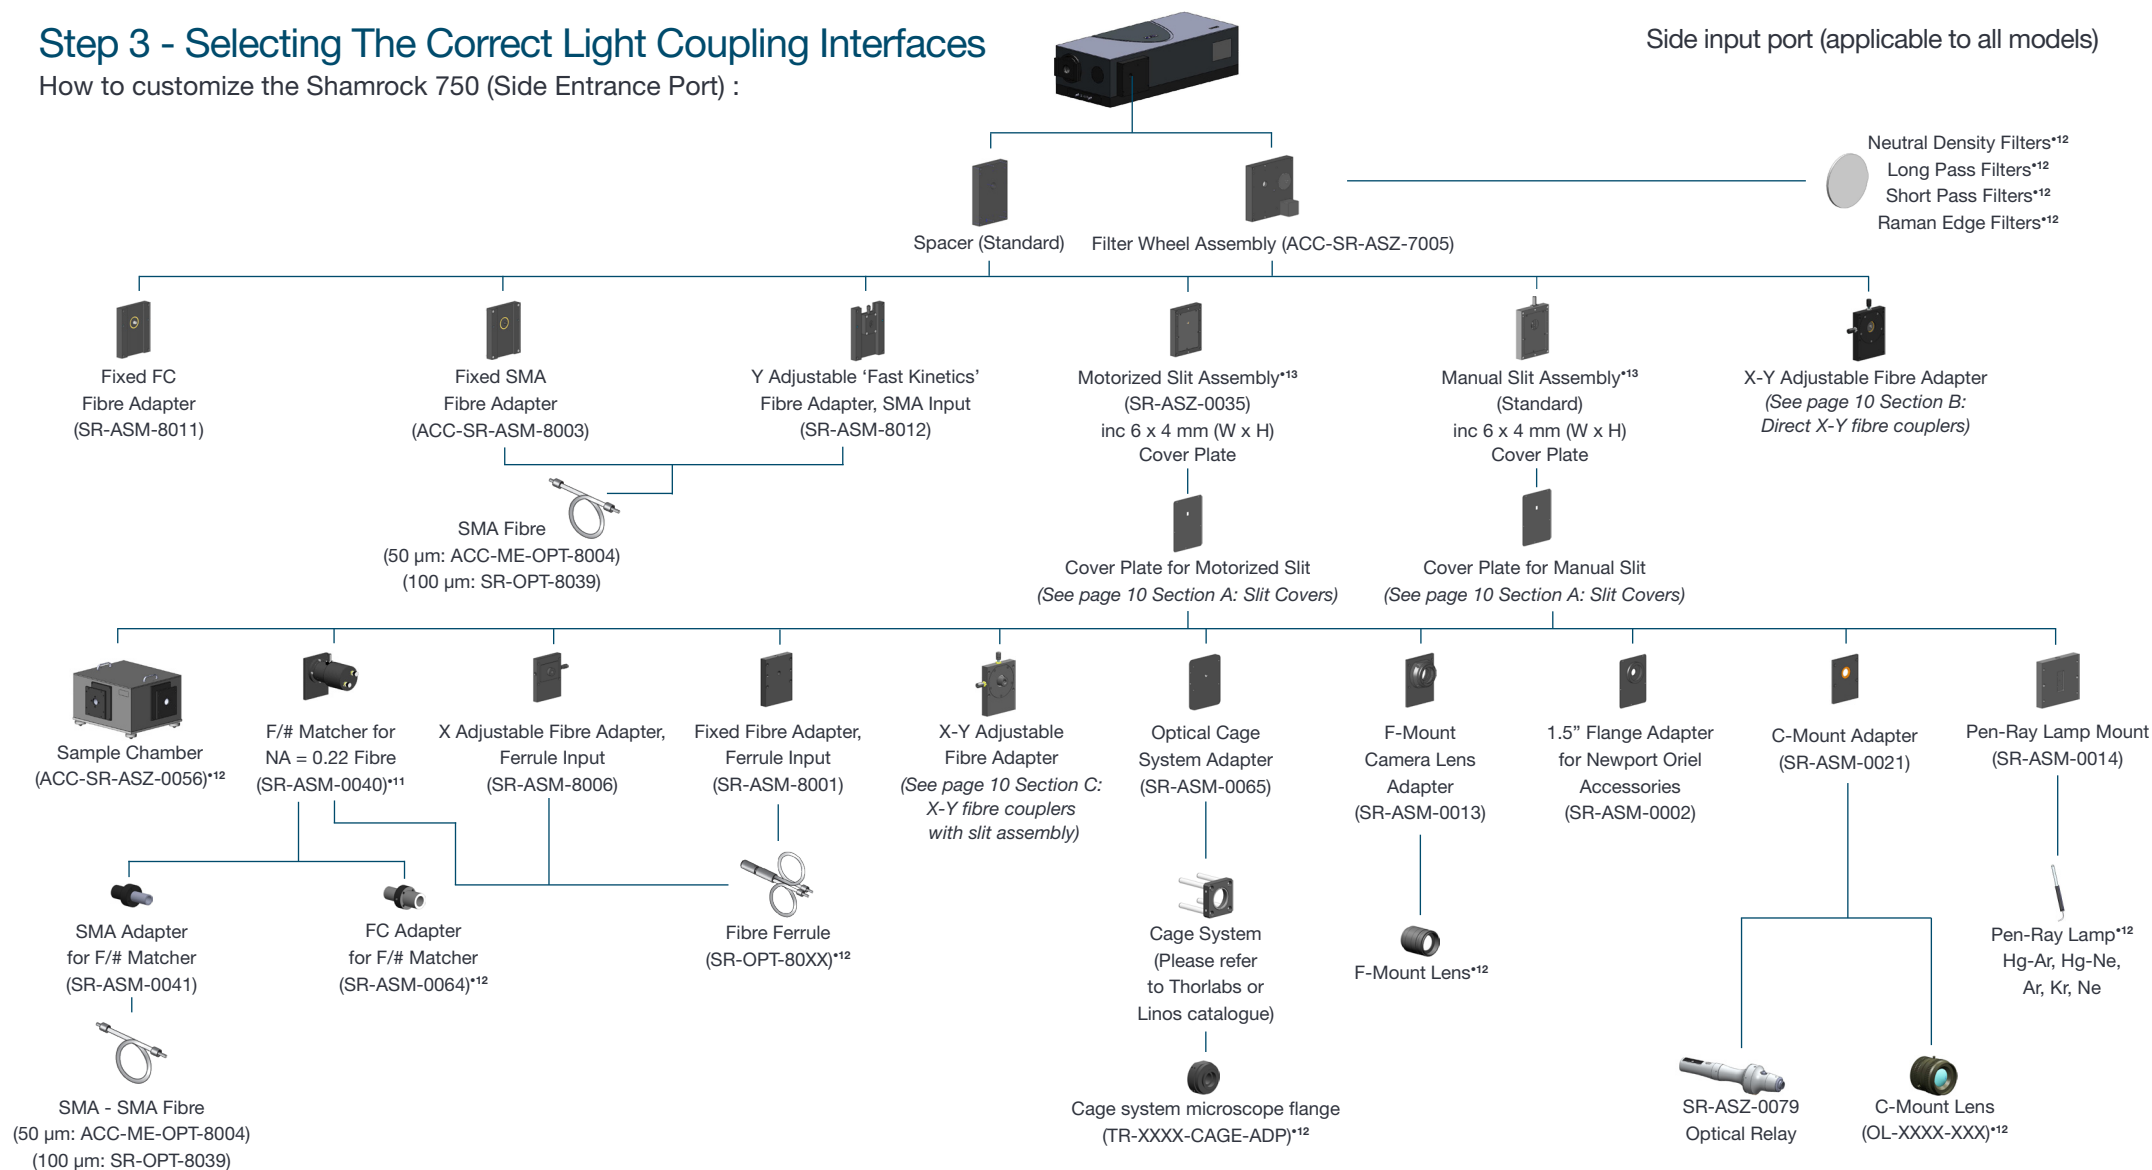

## Step 3 - Selecting The Correct Light Coupling Interfaces


How to customize the Shamrock 750 (Direct Entrance Port):

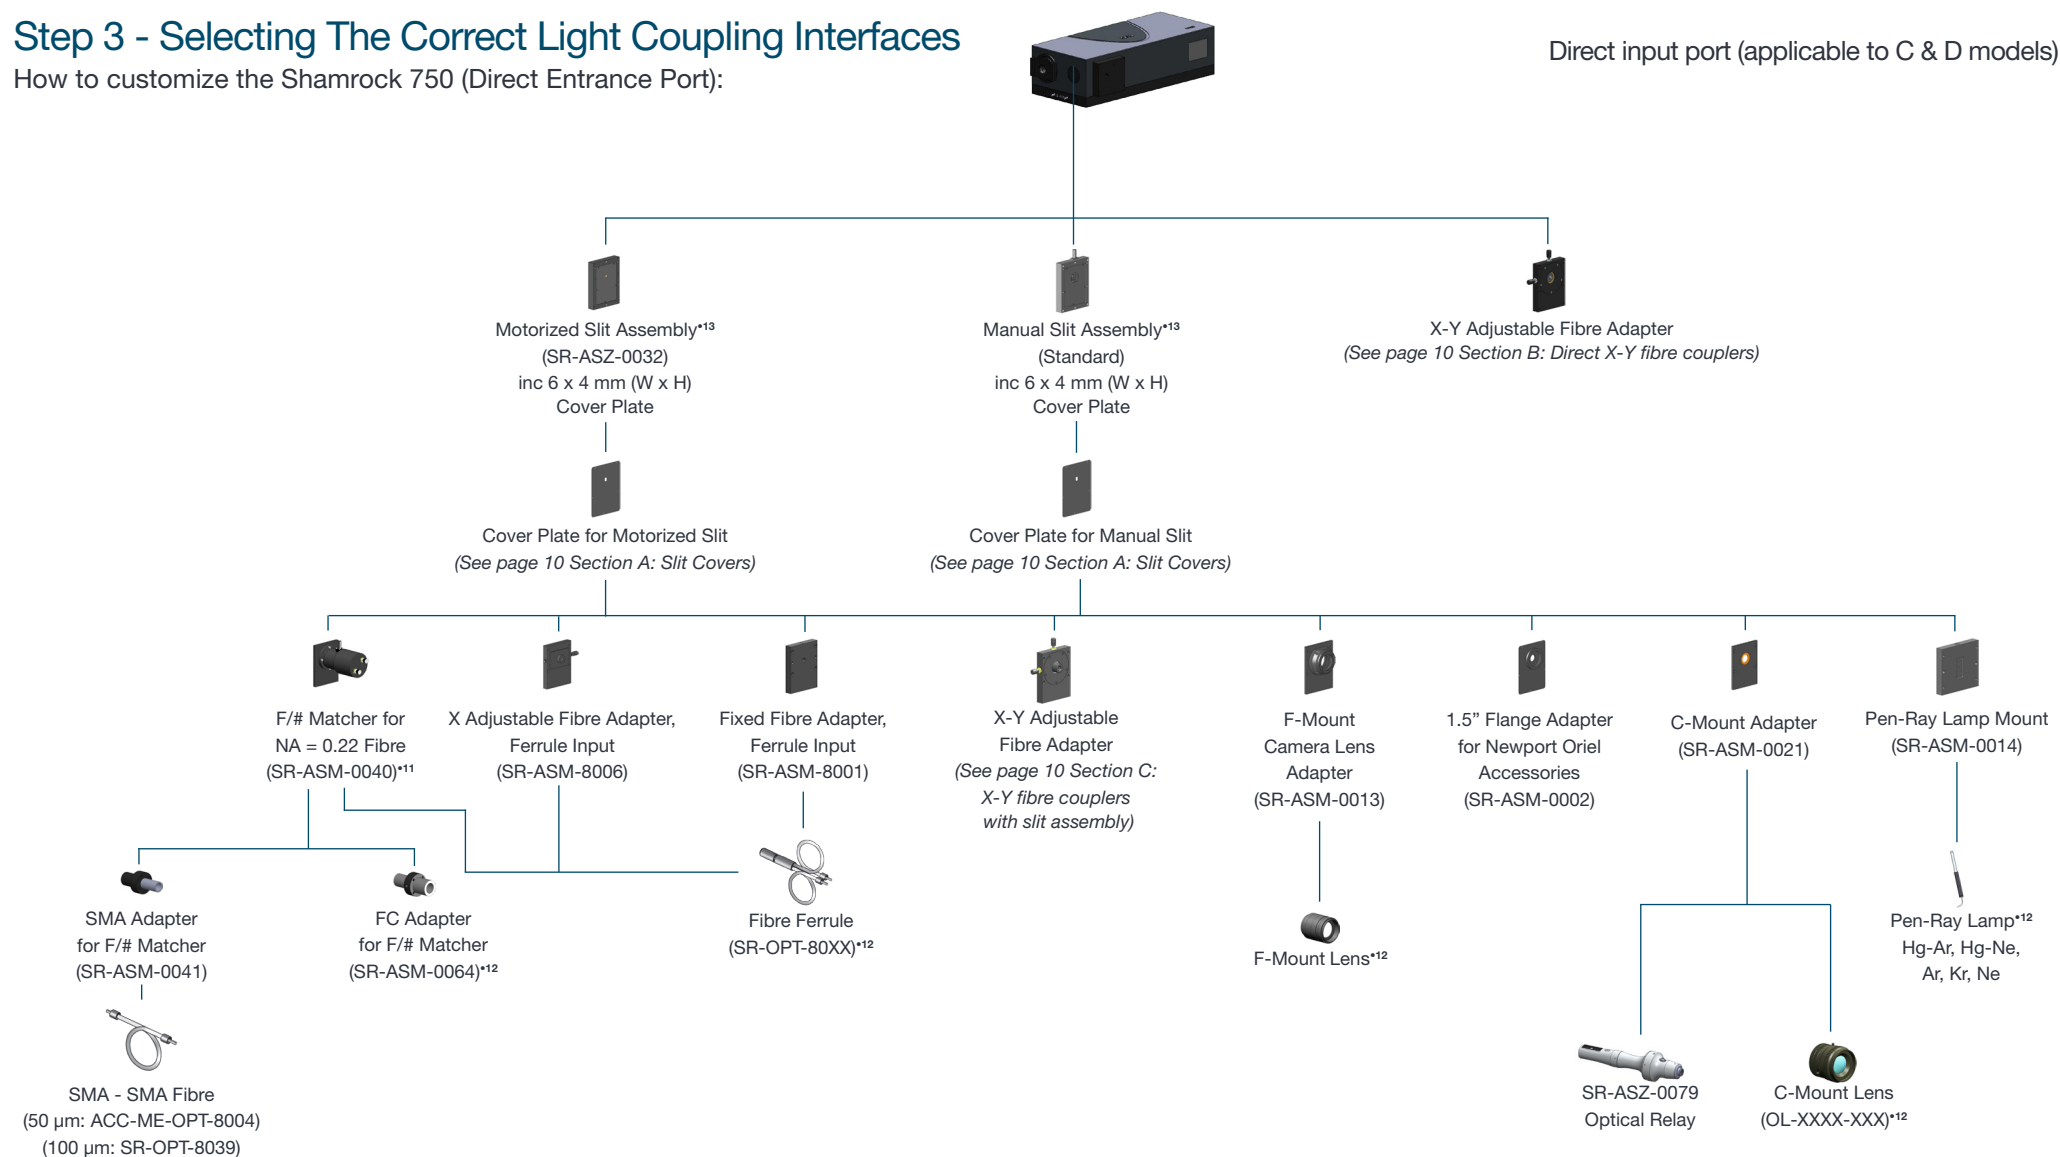



## Step 4 - Cameras & Output Port Flanges

How to customize the Shamrock 750:

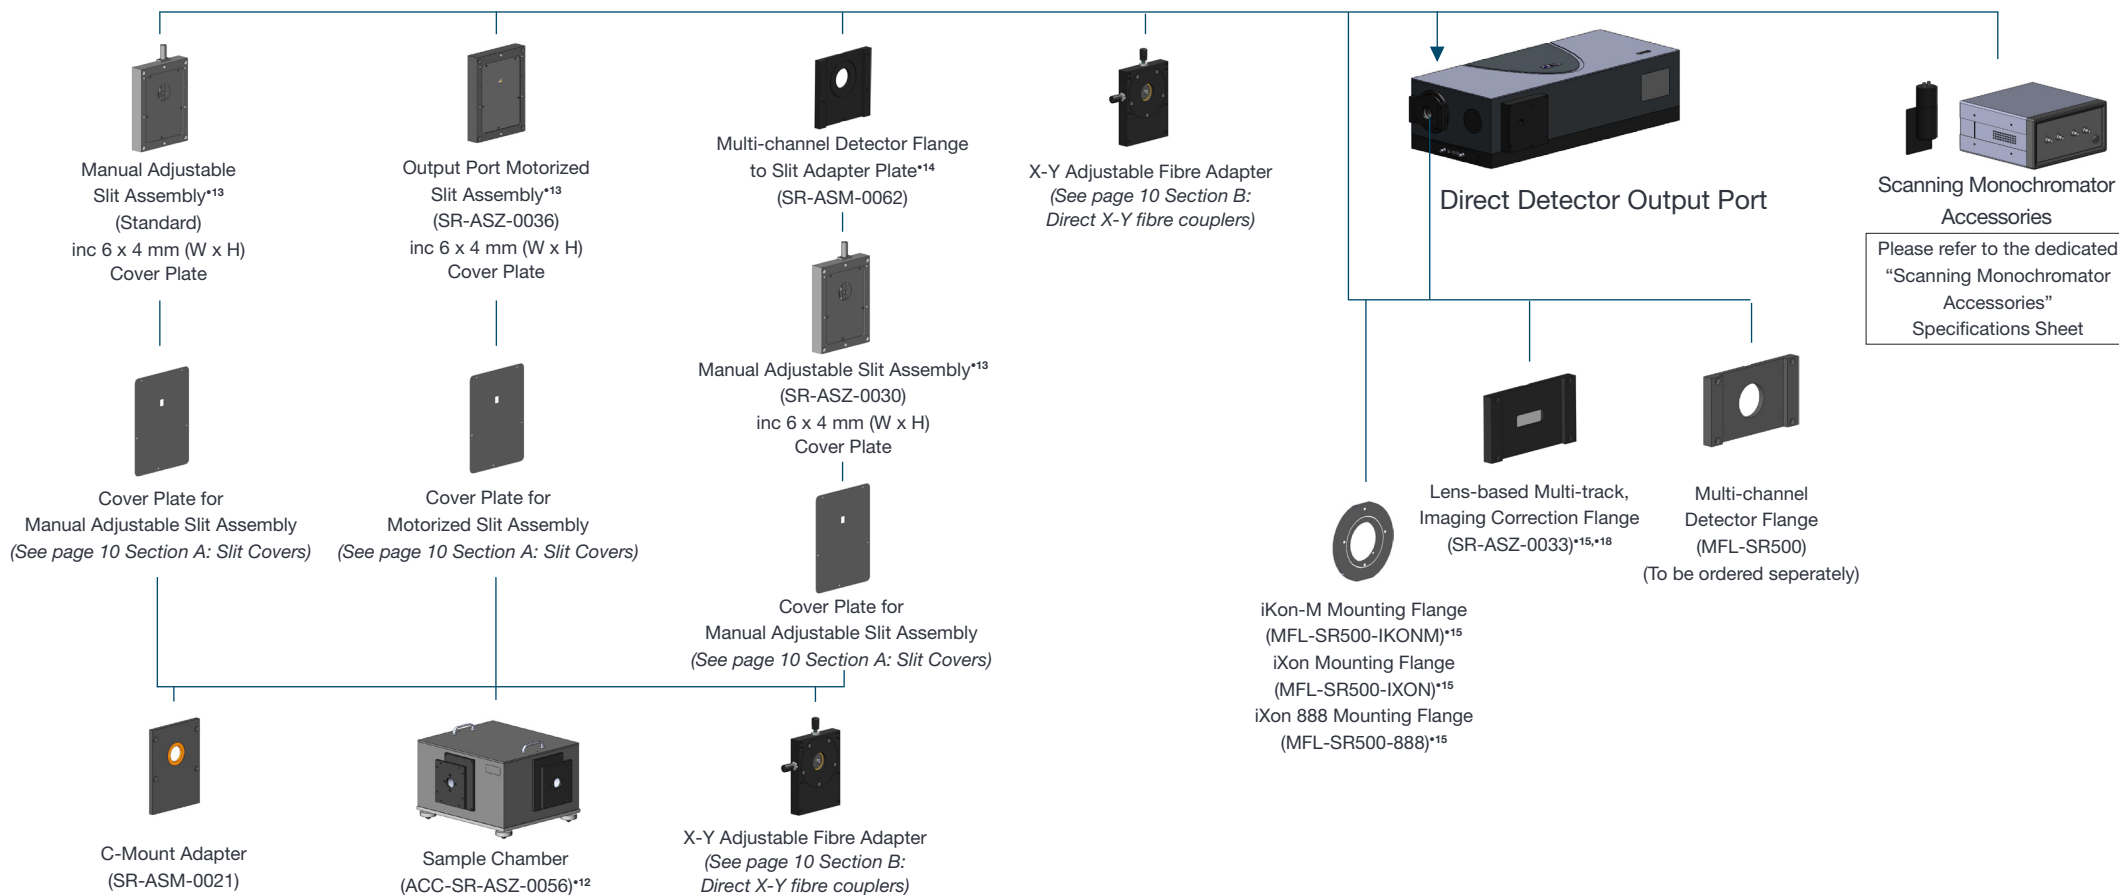

## A: Slit Covers


Cover Plate Apertures for Motorized Slit

Part No.	Size
SR-ASM-0016 <sup>*16</sup>	6 x 4 mm (W x H)
SR-ASM-0017	6 x 6 mm (W x H)
SR-ASM-0010	6 x 8 mm (W x H)
SR-ASM-0011	6 x 14 mm (W x H)
SR-ASM-0015 <sup>*17</sup>	Ø 15 mm


Cover Plate Apertures for Manual Slit

Part No.	Size
SR-ASM-0025	6 x 4 mm (W x H)
SR-ASM-0026	6 x 6 mm (W x H)
SR-ASM-0027	6 x 8 mm (W x H)
SR-ASM-0028	6 x 10 mm (W x H)
SR-ASM-0029 <sup>*16</sup>	6 x 14 mm (W x H)
SR-ASM-0067 <sup>*17</sup>	Ø 15 mm

## B: Direct X-Y Fibre Couplers

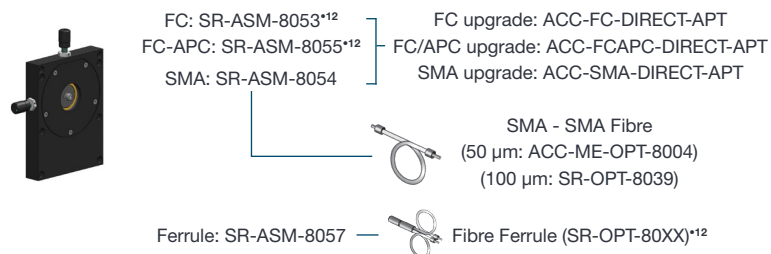



## C: X-Y Fibre Couplers (with Slit Assembly)

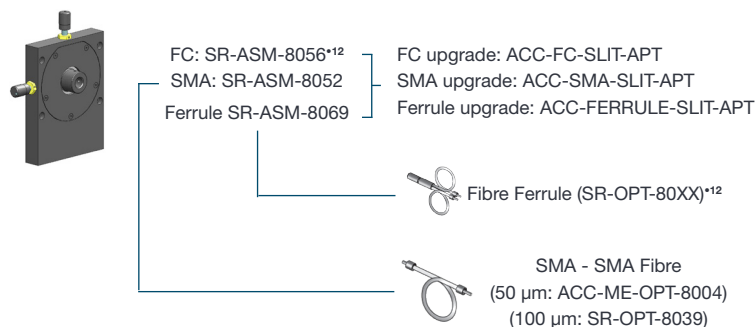



## Product Drawings

Dimensions in mm [inches]

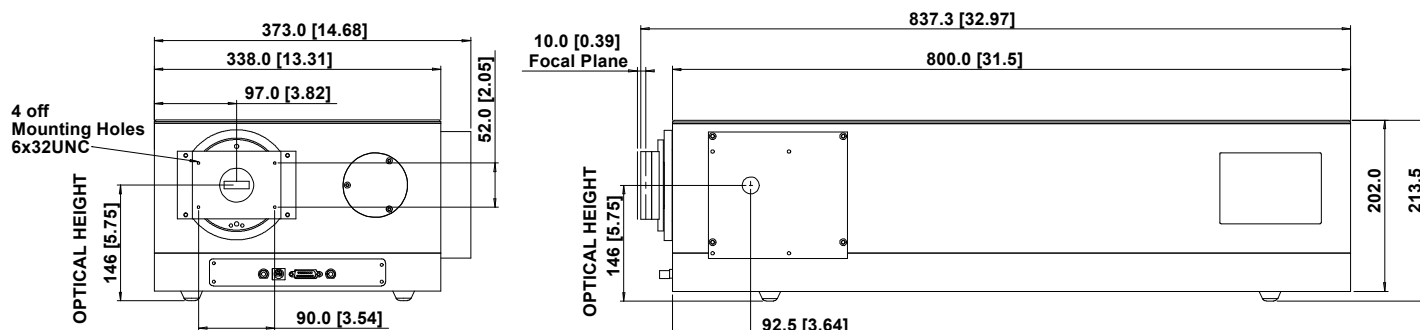

### Optical Axis

The optical path height is shown with standard feet attached.

### Screw Type Requirements

CCD flange to Spectrograph flange	4 off, M4 x 16
Camera to CCD flange	4 off, M3 x 10
iXon camera to iXon flange	4 off, M5 x 10, countersunk, hex head

## Connecting to the Shamrock 750

### USB Shamrock Control

Connector type: USB 'B' type

### Shutter Control

Connector type: BNC Female, 50 Ω

## Applications Guide

Absorption-Transmission-Reflection

Raman (Stimulated, Resonance, CARS, SERS, SORS, TERS)

Fluorescence -Luminescence

Photon Counting

Single Molecule Spectroscopy

Plasma Studies &amp; LIBS

Plasmonics

## Shutter Specifications

Maximum repetition rate	2 Hz
Minimum open/close time	15 ms
Minimum lifetime	Better than 100K cycles

## Optical Property

Focal plane size (mm, W x H)	28 x 14
Stray light *19	
FVB (1 nm from laser)	1.1 x 10 <sup>-4</sup>
FVB (10 nm from laser)	2.6 x 10 <sup>-5</sup>
1 mm strip (1 nm from laser)	1.1 x 10 <sup>-4</sup>
1 mm strip (10 nm from laser)	2.6 x 10 <sup>-5</sup>

## Wavelength Drive Performance

Wavelength accuracy *20 Center	0.03 nm
Wavelength repeatability *21	10 pm

## Wavelength Side Accuracy

Wavelength side accuracy *22	0.08 nm
------------------------------	---------

## Multi-track Capabilities

Imaging, or multi-track, refers to the ability - in the context of a spectrograph - to isolate a series of individual, vertically-stacked spectrum channels with minimum cross-talk.

Czerny-Turner spectrographs are based on off-axis imaging, which introduces distortion at the output focal plane due to aberrations. The introduction of toroidal optics to correct for these aberrations is common for instrument with shorter focal length, i.e. below 600 mm. These 'imaging' correction optics effectively pull together the focal plane of best spectral and best spatial resolutions, known respectively as the tangential and sagittal planes.

However, greater focal length spectrographs, such as Shamrock 750, are principally used for very high spectral resolution from a single spectrum. These instruments are therefore based on classical spherical mirrors and lead to some elongation of the signal in the vertical/imaging axis as shown on Figure 1a, hence limiting stacking of multiple spectral channels.

Andor's optional accessory, SR-ASZ-0033, allows correction of the optical line elongation as shown on Figure 1b, whilst maintaining the spectral resolution performance of the system. Moreover, this accessory introduces a demagnification of around 0.75 therefore increasing the possible density of tracks in the vertical/imaging direction.

Figure 2 illustrates this optical improvement through the use of a broadband source, showing the well-defined narrow channels with minimum cross-talk.

Please contact your local sales representative for further information on high-density, multi-channel fibre-optics.

## Typical Setup - Spectroscopy

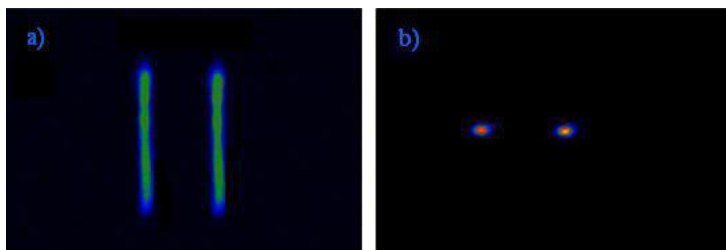
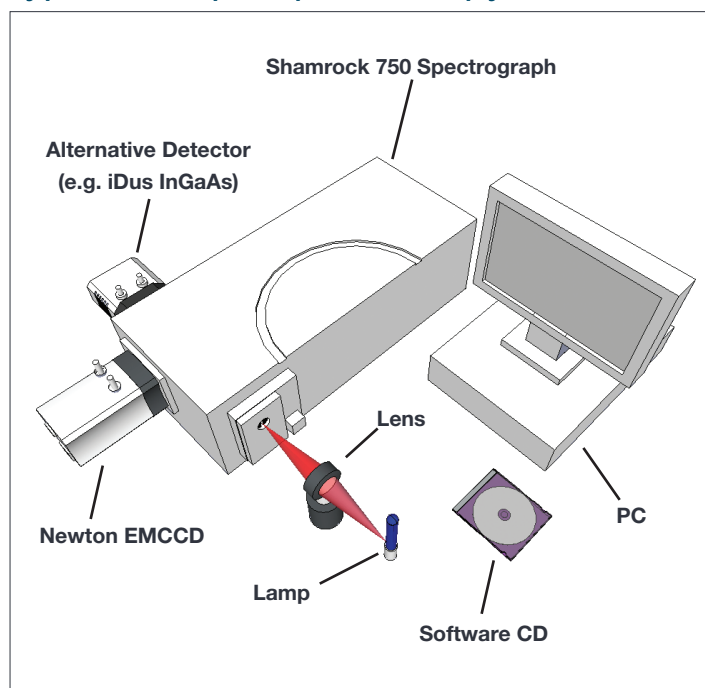


Figure 1. Images produced at the exit of the Shamrock 750 with light from a Mercury source (577 and 579 nm lines) and 100  $\mu\text{m}$  core fibre-optic.

- a. Shows elongation of spectral lines when using the standard Shamrock 750 spherical mirrors - well suited to high-resolution, single spectrum acquisition.
- b. Shows demagnification of spectral lines with optional correction optics SR-ASZ-0033 - this allows stacking of multiple spectral channels with minimum vertical cross-talk and with no impact on spectral resolution.

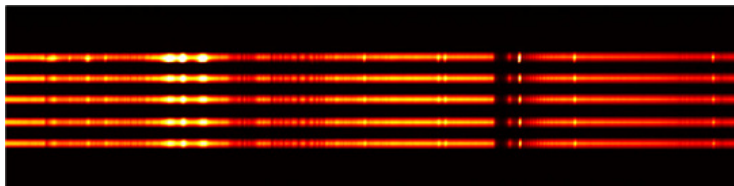


Figure 2. Image produced at the exit of the Shamrock 750 with a combination of broadband and Mercury light sources. A 5-way, 100  $\mu\text{m}$  core fibre-optic assembly was used at the entrance of the spectrograph.



## Order Today

Need more information? At Andor we are committed to finding the correct solution for you. With a dedicated team of technical advisors, we are able to offer you one-to-one guidance and technical support on all Andor products. For a full listing of our local sales offices, please see: [andor.com/contact](http://andor.com/contact)

Our regional headquarters are:

### Europe

Belfast, Northern Ireland  
 Phone +44 (28) 9023 7126  
 Fax +44 (28) 9031 0792

### North America

Connecticut, USA  
 Phone +1 (860) 290 9211  
 Fax +1 (860) 290 9566

### Japan

Tokyo  
 Phone +81 (3) 3518 6488  
 Fax +81 (3) 3518 6489

### China

Beijing  
 Phone +86 (10) 5129 4977  
 Fax +86 (10) 6445 5401

### Items shipped with your spectrograph

- 1x 3 m USB 2.0 cable Type A → Type B
- 1x Power supply with 3 m mains cable
- 1x CD containing Andor user guides
- 1x Individual system performance booklet
- 1x CD containing either Solis software or SDK (if requested at time of order)
- 1x Allen key set (2 mm, 3 mm & 5 mm)

### Regulatory Compliance

Compliant with the requirements of the EU EMC and LV Directives, compliant with the international EMC and safety standards IEC 61326-1 and IEC 61010-1.

### Footnotes: Specifications are subject to change without notice

1. In the case of a multiple grating turret order, please specify desired grating configuration for each turret.
2. SR-SHT-9002 calls for 1x shutter. For dual input port options (C, D1 & D2) it is recommended to order a shutter for each port. Shutter operation only requires BNC to SMB cable from USB cameras or BNC to BNC cable from IO box for PCI iStar.
3. Typical values quoted with 27.6 mm wide CCD, e.g. Newton DU940.
4. Typical values quoted with 10 µm slit and 13.5 µm pixel CCD, e.g. Newton DU940.
5. Typical values quoted at 500 nm centre wavelength.
6. Typical values quoted at 300 nm centre wavelength.
7. Typical values quoted at maximum efficiency wavelength or blaze wavelength unless otherwise stated..
8. Wavelength within the recommended operating spectral region.
9. Indicative values; the working range of these gratings is principally in the region where optical aberrations may alter the system resolution performance quoted.
10. Values shown are representative of a triple grating system, where resolution has been Optimized to give the best performance for the three gratings and across the full recommended wavelength range. Useful signal is assumed to be imaged on the entire height of a 6.9 mm sensor (i.e. Newton DU940) and fully vertically binned.
11. Please refer to F/# matcher specification sheet for magnification considerations.
12. Please refer to the local sales representative or website for further information on available options and complimentary accessories.
13. Slit widths range from 10 µm to 2.5 mm.
14. For B2 and D2 configurations only - to be ordered separately.
15. Please specify relevant port at time of order.
16. Provided as standard.
17. Recommended for use with fibre-optics and C-mount accessories.
18. Please refer to Shamrock 750 multi-track, imaging technical section for further information.
19. Measured with a 633 nm laser and a 1200 l/mm grating for Full Vertical Binning (FVB) on a 6.9 mm high sensor, and a 1 mm strip vertically centred on the optical axis.
20. Average measurements using > 30 calibration lines, covering the recommended grating angle operating range with a 1200 l/mm grating.
21. The standard deviation of 20 measurements of a peak's centre-of-mass position: between each measurement the drive is moved 10x including both wavelength and grating changes to reflect typical use.
22. Side accuracy measured using a 27.6 mm wide sensor, reflecting the dispersion calibration and step-and-glue accuracy.

### Minimum Computer Requirements:

- 3.0 GHz single core or 2.4 GHz multi core processor
- 2 GB RAM
- 100 MB free hard disc to install software (at least 1 GB recommended for data spooling)
- USB 2.0 High Speed Host Controller capable of sustained rate of 40 MB/s
- Windows (XP, Vista and 7)

### Operating & Storage Conditions

Operating Temperature 0°C to 30°C ambient  
 Relative Humidity < 70% (non-condensing)  
 Storage Temperature -25°C to 50°C

### Power Requirements

110 - 240 Vac, 50 - 60 Hz



Windows is a registered trademark of Microsoft Corporation.  
 Labview is a registered trademark of National Instruments.  
 Matlab is a registered trademark of The MathWorks Inc.

SShamrock750SS 1112 R1